

SMD LVPECL Crystal Oscillators - Differential Output

3.2 x 2.5 x 1.1 mm DC Series



Features


- PLL solution.
- 3.3V and 2.5V operation available.
- LVPECL output, output frequencies 15MHz to 2.1GHz.
- Excellent low phase noise and jitter.
- Tri-state function available.
- Applications : Fibre Channel, Gigabit Ethernet, Serial ATA, Serial Attached SCSI, PCI-Express, SDH / SONET.
- RoHS compliant / Pb Free.

Electrical Specifications

Item / Type	DC
Output Type	LVPECL
Output Load	50 Ω
Oscillation Mode	PLL
Supply Voltage	2.5 V , 3.3 V
Frequency Range	15M ~ 2.1G
Overall Frequency Stability *	± 50 ppm , or specify
Operating Temperature Range	-10 ~ + 70 °C , - 40 ~ + 85 °C , or specify
Storage Temperature Range	- 55 ~ + 125 °C
Voltage Vol (Max.) / Voh (Min.)	VDD - 1.55 V / VDD - 1.165 V
Rise (Tr) / Fall (Tf) Time (20 % ~ 80 %)	0.5 nS Max.
Supply Current	106 mA Max.
Symmetry	45 ~ 55 %
Start-up Time	10 mS Max.
Phase Jitter (12 KHz ~ 20 MHz)	0.5 pS Max.

* Inclusive of frequency tolerance at 25 °C, variation over temperature, supply voltage variation, aging and vibration.

Dimensions

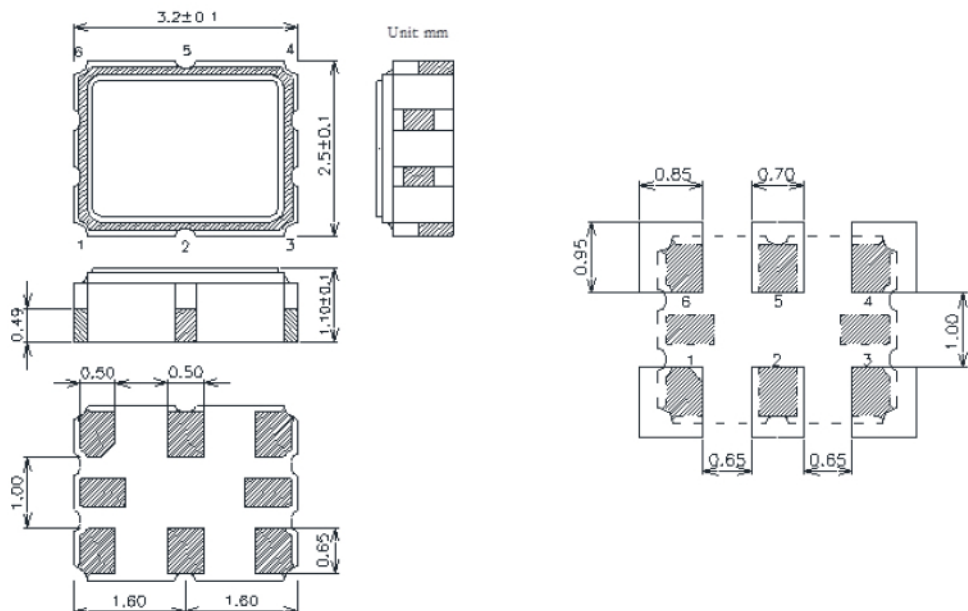

Units: mm