

# 1.6x1.2 SMD Crystal



深圳市晶鸿辉电子有限公司

深圳市福田区福虹路世贸广场裙楼4楼

网址: <http://www.jhhdz.com>

电话: (755) 8365 1619 传真: (755) 8387 6331 QQ: 40395117 邮箱: sz\_ysdz@163.com

## 产品规格书 SPECIFICATION


标题 Title: 石英晶体谐振器规格书 QUARTZ CRYSTAL SPECIFICATION

### FEATURE

- Rugged AT-cut crystal construction.
- Miniature 1.6×1.2mm ceramic package.
- Designed for automatic mounting and reflow soldering.
- Embossed tapping specification.
- Pb-free and RoHS/Green compliant.

### APPLICATIONS

- Ideally suited designed for Bluetooth wireless communication sets, HDD, DSN, PDA, GPS, Digital Tuner, Wireless LAN and mobile phone.

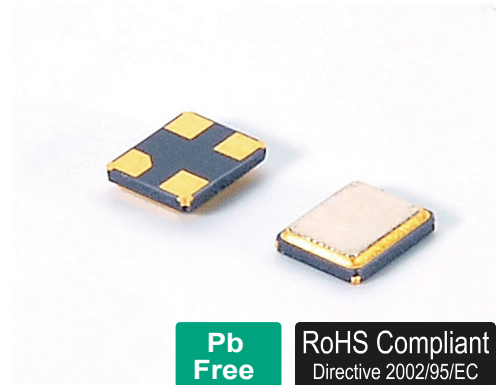

Pb Free

RoHS Compliant  
Directive 2002/95/EC

### Electrical Characteristics 技术指标

型号	Holder Type	Ceramic Surface Mount
频率范围	Frequency Range	26.000MHz to 54.000MHz
调整频差	Frequency Tolerance ( $\Delta F$ ) (at 25°C)	$\pm 10$ ppm to $\pm 30$ ppm
温度频差	Frequency Drift	$\pm 10$ ppm to $\pm 30$ ppm※(See Notes)
工作温度范围	Operating Temperature Range	-20°C - +70°C / -40°C - +85°C
储存温度范围	Storage Temperature Range	-40°C - +85°C / -55°C - +125°C
老化	Aging (25°C)	$\pm 3$ ppm/year max.
静电容	Shunt Capacitance (C0)	3pF max.
激励功率	Drive Level	10 $\mu$ w (100 $\mu$ W max.)
绝缘阻抗	Insulation Resistance (Rs)	500 Megaohms Minimum at D.C100V
负载电容	Load Capacitance (CL)	Suggested by customer


※Notes:  $\pm 10$ ,  $\pm 20$ ,  $\pm 30$ ppm (-20°C to +70°C)  
 $\pm 20$ ,  $\pm 30$ ,  $\pm 50$ ppm (-40°C to +85°C) or depends on customer

### Equivalent Series Resistance and Mode of Operation

等效阻抗和振荡模式

Frequency Range 频率范围	ESR ( $\Omega$ ) 等效阻抗	Mode 振荡模式
26.000MHz $\leq$ f < 32.000MHz	150 $\Omega$ max	Fundamental
32.000MHz $\leq$ f < 38.000MHz	100 $\Omega$ max	Fundamental
38.000MHz $\leq$ f < 54.000MHz	80 $\Omega$ max	Fundamental

### Reflow Condition(回流焊条件)

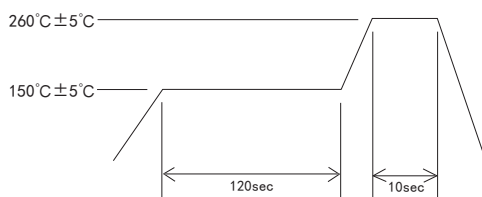

CYCLE TIME: 200sec Max.

### Mechanical Dimensions 外型尺寸

