

HALF SIZE(8PIN) OSCILLATOR

JHH 深圳市晶鸿辉电子有限公司

深圳市福田区福虹路世贸广场裙楼4楼

网址: <http://www.jhhdz.com>

電話: (755) 8365 1619 傳真: (755)8387 6331

QQ: 40395117 郵箱: sz_ysdz@163.com


产品规格书 SPECIFICATION

FEATURE

- All metal welded package.
- Broad frequency range from 0.25Mhz to 180Mhz.
- Built-in C-MOS IC with tri-state function.
- 5V and 3.3V supply model available.
- Pb-free and RoHS/Green compliant.

APPLICATIONS


- Ideally suited designed for use in monitor, computers, wireless lan card & wire lan card, CD-PLAYER, HDD, Work station.

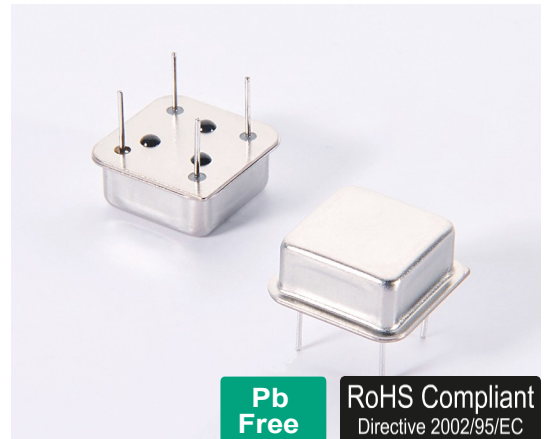


•Electrical Specifications 电气参数

型号	Holder Type	HALF SIZE (8PIN) OSCILLATOR
频率范围	Frequency Range	1.000 Mhz to 100.000 Mhz
总频差	Frequency Stability	±25ppm to ±50ppm
输入电压	Supply Voltage	5.0V or 3.3V ±10%
工作温度范围	Operating Temperature Range	-10°C - +60°C to -40°C - +85°C
储存温度范围	Storage Temperature Range	-40°C - +85°C/-55°C - +125°C
占空比	Symmetry (Duty Cycle)	40/60 Standard
输出	Output Load 5.0 V	10 TTL or 15pF Hemos
	Output Load 3.3 V	10 TTL or 15pF Hemos
消耗电流	Current Consumption 5.0V (15pf only)	1.000Mhz - 35.999Mhz=25mA max
		36.000Mhz - 69.999Mhz=60mA max
		70.000Mhz - 100.000Mhz=80mA max
	Current Consumption 3.3V (15pf only)	1.000Mhz - 35.999Mhz=20mA max
		36.000Mhz - 69.999Mhz=40mA max
		70.000Mhz - 100.000Mhz=60mA max
上升/下降时间	Rise/Fall Time	5 nS max

•Mechanical Dimensions 外型尺寸

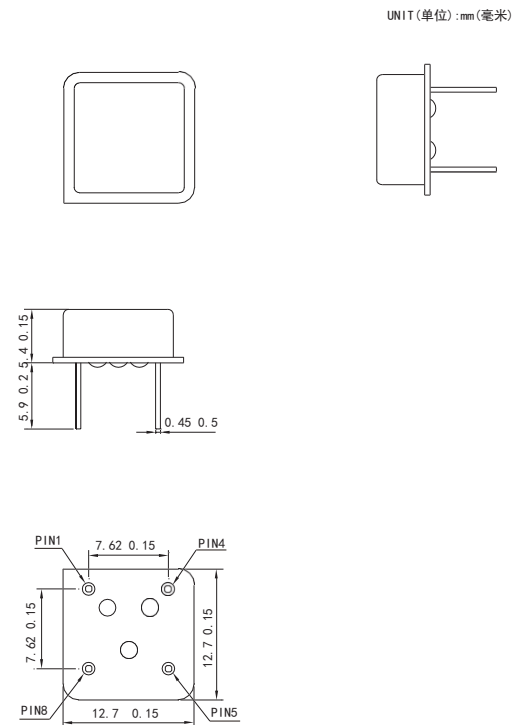

•Test Circuit(测试电路)

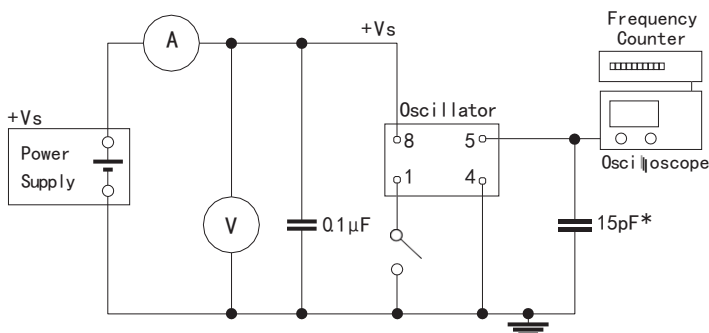

PIN	FUNCTION
1	N/C or Tri-state
4	Ground
5	Output
8	Vdd