

5.0x3.2 SMD VCTCXO

JHH 深圳市晶鸿辉电子有限公司

深圳市福田区福虹路世贸广场裙楼 4 楼 网址: <http://www.jhhdz.com>
 电话: (755) 8365 1619 传真: (755)8387 6331 QQ: 40395117 邮箱: sz_ysdz@163.com

产品规格书 SPECIFICATION


标题 Title: 石英晶体温补振荡器规格书

FEATURE

- SMD type Crystal Oscillator
- Miniature and lightweight
- Low phase noise
- One Chip IC assures high reliability

APPLICATION

- Mobile phones, GPS applications and other mobile communications.

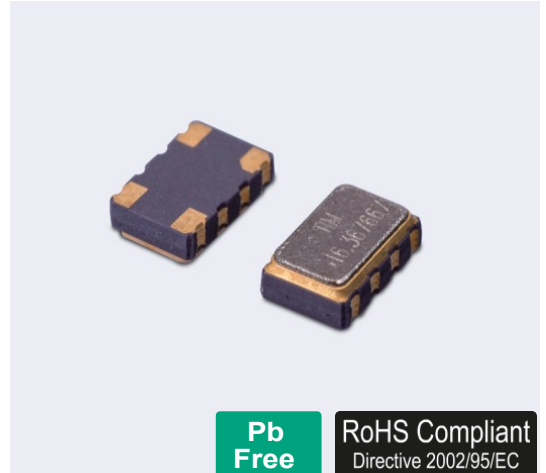


Pb Free **RoHS Compliant**
Directive 2002/95/EC


Electrical Specifications 电气参数

型号	Holder Type	5.0×3.2 SMD VCTCXO
频率范围	Frequency Range	0.5Mhz to 160Mhz
电压	Supply Voltage	5.0V or 3.3V ±10%
工作温度范围	Operating Temperature Range	-10℃ - +60℃ to -40℃ - +85℃
保存温度范围	Storage Temperature Range	-40℃ - +85℃
负载	Output load	<10K // 10 PF> +10%
频率偏差	Frequency Deviation	2.0ppm Max
频率稳定度	Frequency Stability	±0.5ppm to ±2.5ppm
老化	Aging	±1ppm Max./year
消耗电流	Current Consumption	20mA Max
相位噪声	SSB Phase Noise	
	100Hz offset typical	-113dB/Hz
	1KHz offset typical	-135dB/Hz
	10KHz offset typical	-148dB/Hz

Mechanical Dimensions 外型尺寸

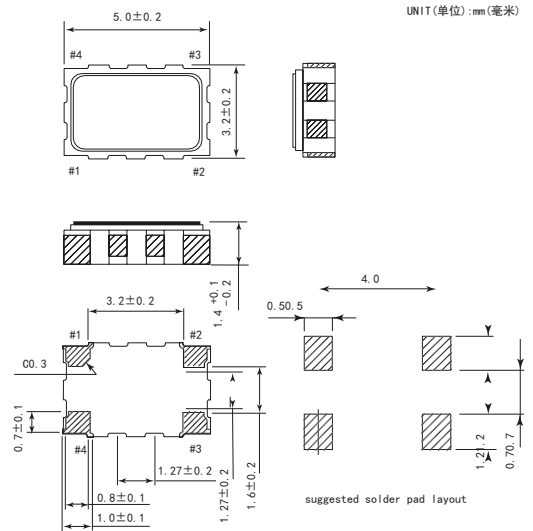

Test Circuit (测试电路)

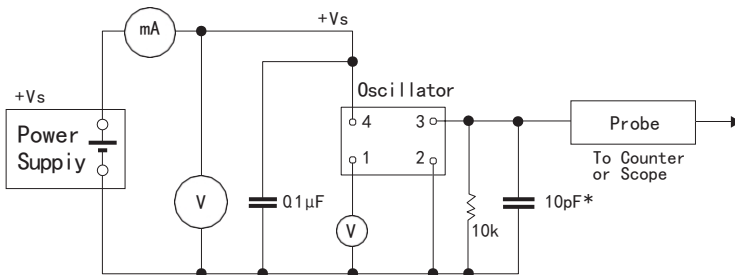

脚位	脚位连接Connection	
PIN	VC-TCXO	TCXO
1	Vc	N. C.
2	GND	
3	OUT	
4	Vcc	

※Note:0.01uF bypass capss capacitor should ben placed between Vcc(PIN4) and GND(PIN2) to Minimize power supply line noise.