



Serial No. : 2010-1102

DATE : 2010/09/10

YULONG COMPUTER TELECOMMUNICATION SCIENTIFIC  
(SHENZHEN) CO.,LTD.

ITEM :

CRYSTAL OSCILLATOR

TYPE :

DSA321SCA

NOMINAL FREQUENCY :

19.200MHz

SPEC No. :

1XTV19200ACW

Please acknowledge receipt of this specification  
by signing and returning a copy to us.

RECEIPT	
DATE	
RECEIVED	(signature)  (name)

General Manufacturer of Quartz Devices

**DAISHINKU CORP.**

1389 Shinzaike, Hiraoka-cho, Kakogawa, Hyogo  
675-0194 Japan

Phone (81)79-425-3141 Fax (81)79-425-1134

[http://www.kds.info/index\\_en.htm](http://www.kds.info/index_en.htm)

C.ENG.

*M. Yamashita*

ENG.

*H. Takase*

1. Device Name VC-TCXO  
 2. Model Name DSA321SCA  
 3. Nominal Frequency 19.200 MHz  
 4. Mass 0.03g max.  
 5. Absolute Maximum Ratings

	Item	Symbol	Rating	unit
1	Supply Voltage	V <sub>CC</sub>	-0.3 ~ +6.0	V
2	Storage Temperature Range	T <sub>STG</sub>	-40 ~ +85	°C

## 6. Recommended Operating Conditions

	Item	Symbol	min.	typ.	max.	unit
1	Supply Voltage	V <sub>CC</sub>	+2.66	+2.8	+2.94	V
2	Load Impedance (resistance part)	L <sub>LOAD_R</sub>	9	10	11	kΩ
	(parallel capacitance)	L <sub>LOAD_C</sub>	9	10	11	pF
3	Control Voltage Range	V <sub>CONT</sub>	+0.4	+1.4	+2.4	V
4	Operating Temperature Range	T <sub>OPR</sub>	-30	-	+85	°C

## 7. Electrical Characteristics

(T<sub>A</sub> = -30 ~ +85°C, L<sub>LOAD\_R</sub>/C = 10kΩ//10pF, V<sub>CC</sub> = +2.8V, V<sub>CONT</sub> = +1.4V, unless otherwise noted)

	Item	Conditions	Limits			unit	Notes
			min.	typ	max.		
1	Current Consumption		-	-	1.5	mA	
2	Output Level		0.8	-	-	V <sub>P-P</sub>	1
3	Symmetry	GND level (DC cut)	40/60	-	60/40	%	
4	Harmonics		-	--	-5	dBc	
5	Frequency Stability						
	1.Tolerance	After 2 times reflow Ref. to Nominal Frequency	-	-	±1.5	ppm	2
	2.vs Temperature	T <sub>A</sub> = -30 ~ +85 °C Ref. to Frequency (T <sub>A</sub> = +25°C)	-	-	±2.0	ppm	
	3.vs Supply Voltage	V <sub>CC</sub> = +2.8V ±5%	-	-	±0.3	ppm	
	4.vs Load Variation	L <sub>LOAD_R</sub> /C = (10kΩ//10pF) ±10%	-	-	±0.2	ppm	
	5.vs Aging	T <sub>A</sub> = Room ambient	-	-	±0.7	ppm/year	
6	Start Up	@90% of final V <sub>OUT</sub> level	-	-	2.0	ms	
7	Frequency Control						
	1.Control Range	V <sub>CONT</sub> = +0.4 ~ +2.4V (V <sub>CONT</sub> = +1.4V)	±5.5	-	±12	ppm	3
	2.Input Resistance		500	-	-	kΩ	
8	SSB Phase Noise	Relative to f <sub>0</sub> level offset 1kHz	-	-	-130	dBc/Hz	

## Notes

1. Clipped sine wave (DC-coupled)
2. Please leave after reflow in 2h or more at room ambient.
3. Positive slope (Frequency becomes high in proportion to frequency control voltage.)

TITLE  
DSA321SCA TYPE SPECIFICATION

Remark

Date  
2010/09/06


Spec. No.  
1XTV19200ACW

Rev.  
-

Page  
1/13

### 8. Outline, Pin Connections

#### Outline

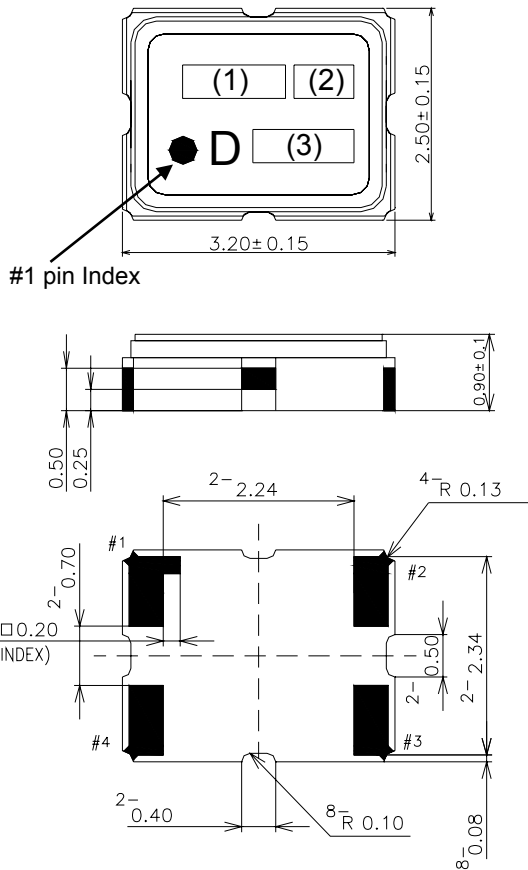

#### Pin Connections

Pin No.	Connection
#1	V <sub>CONT</sub>
#2	GND
#3	Output
#4	V <sub>CC</sub>

#### Marking


- (1) Frequency 19.20 (MHz, 4digits)
- (2) Model code P
- (3) EIA Date code Year (1digit) +Week (2digits)  
e.g.2010/1/1 → 001

unit: mm

Dimensional Tolerance: ±0.15

(Unless otherwise noted)

### 9. Measurement Circuit

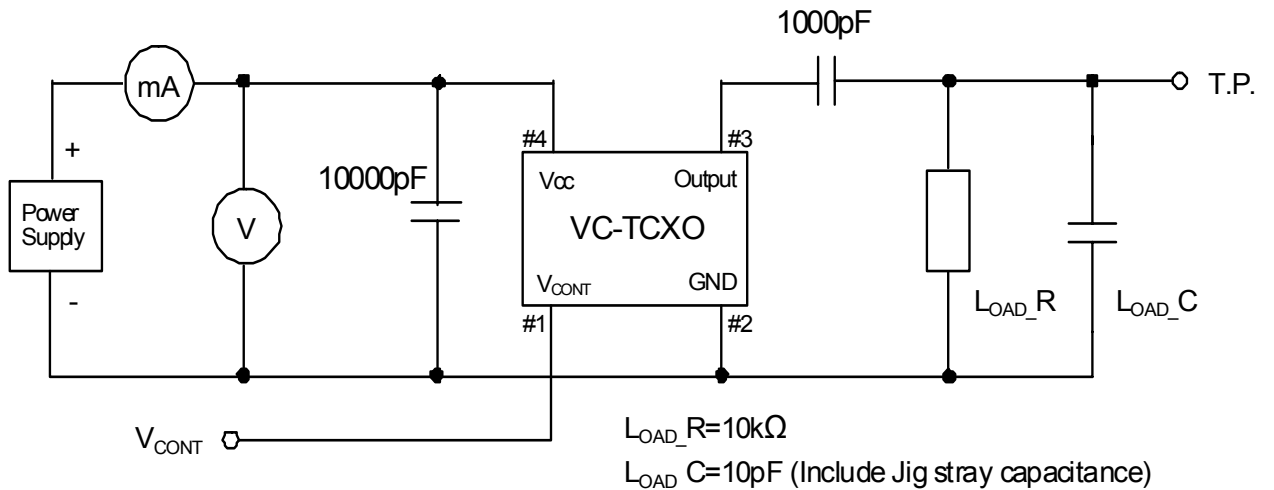

TITLE DSA321SCA TYPE SPECIFICATION		Remark	
Date 2010/09/06	Spec. No. 1XTV19200ACW	Rev. -	Page 2/13

## 10. Mechanical Characteristics

All test is performed after 3times reflow (Clause.13) except 10.10 (Resistance to soldering heat)

	Item	Description	Requirements
1	Drop	Natural drop (On concrete) Mounting on the set or test fixture.(Total weight 100g) Height : 150cm Direction : X,Y,Z, 6directions Test cycle : 3cycles Reference specification : EIAJ-ED-4702A Method5	df/f=<±1.0ppm
2	Vibration	Sweep range : 10~500Hz Sweep speed : 11min/cycle Amplitude : 1.5mm (10~55Hz) Acceleration : 200m/s <sup>2</sup> (55~500Hz) Direction : X,Y,Z, 3directions Test cycle : 10cycles Reference specification : IEC 60068-2-6	df/f=<±0.5ppm
3	Shock	Acceleration : 1000m/s <sup>2</sup> Direction : X,Y,Z, 6directions Duration : 6ms Test cycle : 3cycles/each directions Reference specification : IEC 60068-2-27	df/f=<±0.5ppm
4	PCB bend strength	PWB : t=1.6mm Pressure speed : 1.0mm/s Bend width : 1→2→3mm Duration : 10±1s Reference specification : IEC 60068-2-21 Ue1	df/f=<±0.5ppm No visible damage. No leak damage.
5	Adherence nature	PWB : t=1.6mm Direction : X,Y, 2directions Pressure : 10N Duration : 10±1s Reference specification : IEC 60068-2-21 Ue3	df/f=<±0.5ppm No visible damage. No leak damage.
6	Package strength	Pressure : 10N Duration : 10±1s Reference specification : IEC 60068-2-77	df/f=<±0.5ppm No mechanical damage. No leak damage.
7	Gross leak	It is immersed for 3min into +125±5°C Chlorofluorocarbon (CFCs) liquid. Reference specification : IEC 60068-2-17	No continuous air bubbles.
8	Fine leak	It shall be measured by the helium leak detector after pressurization for 60min by the pressure of (3.92±0.49) x10 <sup>5</sup> Pa in a helium gas atmosphere. Reference specification : IEC 60068-2-17	Less than 1.0x10 <sup>-9</sup> Pa m <sup>3</sup> /s.
9	Solderability	Solder bath temperature : +245±5°C Duration : 3±0.3s Reference specification : IEC 60068-2-58	A new uniform coating of solder shall cover a minimum of 95% of the surface being immersed.
10	Resistance to soldering heat	1) Solder iron method Bit size : B(φ3) Bit temperature : +350±10°C Duration : 3+1/-0s /each terminal It shall be measured after 2h at room temperature, humidity. Reference specification : IEC 60068-2-20	df/f=<±0.5ppm dV <sub>OUT</sub> =<±0.2V <sub>P-P</sub> No visible damage.
		2) Reflow In refer to temperature profile shown in clause13. Test cycle : 3cycles It shall be measured after 2h at room temperature, humidity. Reference specification : IEC 60068-2-58	df/f=<±1.0ppm dV <sub>OUT</sub> =<±0.2V <sub>P-P</sub> No visible damage.

TITLE DSA321SCA TYPE SPECIFICATION		Remark		
Date 2010/09/06	Spec. No. 1XTV19200ACW	Rev. -	Page 3/13	

## 11. Environmental Characteristics

All test is performed after 3times reflow (Clause13)

	Item	Description	Requirements
1	Low temperature storage	Temperature : $-40\pm 3^{\circ}\text{C}$ Duration : 1000h It shall be measured after 2h at room temperature, humidity. Reference specification : IEC 60068-2-1 Ab	$df/f = < \pm 1.0\text{ppm}$ $dV_{\text{OUT}} = < \pm 0.2V_{\text{P-P}}$ The electrical characteristics are satisfied.
2	High temperature storage	Temperature : $+85\pm 2^{\circ}\text{C}$ Duration : 1000h It shall be measured after 2h at room temperature, humidity. Reference specification : IEC 60068-2-2 Bb	$df/f = < \pm 1.0\text{ppm}$ $dV_{\text{OUT}} = < \pm 0.2V_{\text{P-P}}$ The electrical characteristics are satisfied.
3	Humidity	Temperature : $+85\pm 2^{\circ}\text{C}$ R.H. $85\pm 5\%$ Duration : 1000h It shall be measured after 2h at room temperature, humidity. Reference specification : IEC 60068-2-3	$df/f = < \pm 1.0\text{ppm}$ $dV_{\text{OUT}} = < \pm 0.2V_{\text{P-P}}$ The electrical characteristics are satisfied.
4	HTB	Temperature : $+85\pm 2^{\circ}\text{C}$ Duration : 1000h BIAS : Max value of supply voltage It shall be measured after 2h at room temperature, humidity. Reference specification : IEC 60068-2-2 Bb	$df/f = < \pm 1.0\text{ppm}$ $dV_{\text{OUT}} = < \pm 0.2V_{\text{P-P}}$ The electrical characteristics are satisfied.
5	THB	Temperature : $+40\pm 2^{\circ}\text{C}$ R.H. $90\sim 95\%$ Duration : 1000h BIAS : Max value of supply voltage It shall be measured after 2h at room temperature, humidity. Reference specification : IEC 60068-2-3	$df/f = < \pm 1.0\text{ppm}$ $dV_{\text{OUT}} = < \pm 0.2V_{\text{P-P}}$ The electrical characteristics are satisfied.
6	Thermal shock	Thermal shock : $-40\pm 3^{\circ}\text{C}$ : 0.5h $\leftrightarrow$ $+85\pm 2^{\circ}\text{C}$ : 0.5h Test cycle : 200cycles Shift time : 2~3min It shall be measured after 2h at room temperature, humidity. Reference specification : IEC pub.68-2-14.Na	$df/f = < \pm 1.0\text{ppm}$ $dV_{\text{OUT}} = < \pm 0.2V_{\text{P-P}}$ The electrical characteristics are satisfied.
7	ESD	Model : Machine Model (MM) $V = \pm 200\text{V}$ ( $C1 = 200\text{pF}$ , $R1 = 0\Omega$ ) Number of times : 3times Each terminal except common terminal. (Connect to test terminal) Reference specification : EIA/JESD22-A114	$df/f = < \pm 1.0\text{ppm}$ $dV_{\text{OUT}} = < \pm 0.2V_{\text{P-P}}$ The electrical characteristics are satisfied.
		Model : Human Body Model (HBM) $V = \pm 1500\text{V}$ ( $C1 = 100\text{pF}$ , $R1 = 1500\Omega$ ) Number of times : 3times Each terminal except common terminal. (Connect to test terminal) Reference specification : EIA/JESD22-A115	$df/f = < \pm 1.0\text{ppm}$ $dV_{\text{OUT}} = < \pm 0.2V_{\text{P-P}}$ The electrical characteristics are satisfied.

TITLE  
DSA321SCA TYPE SPECIFICATION

Remark

Date  
2010/09/06


Spec. No.  
1XTV19200ACW

Rev.  
-


Page  
4/13

12. Flatness of Terminal

When the component is placed on the flat surface, the gap from the connecting terminal shall not exceed 0.05 mm.



13. Reflow Profile

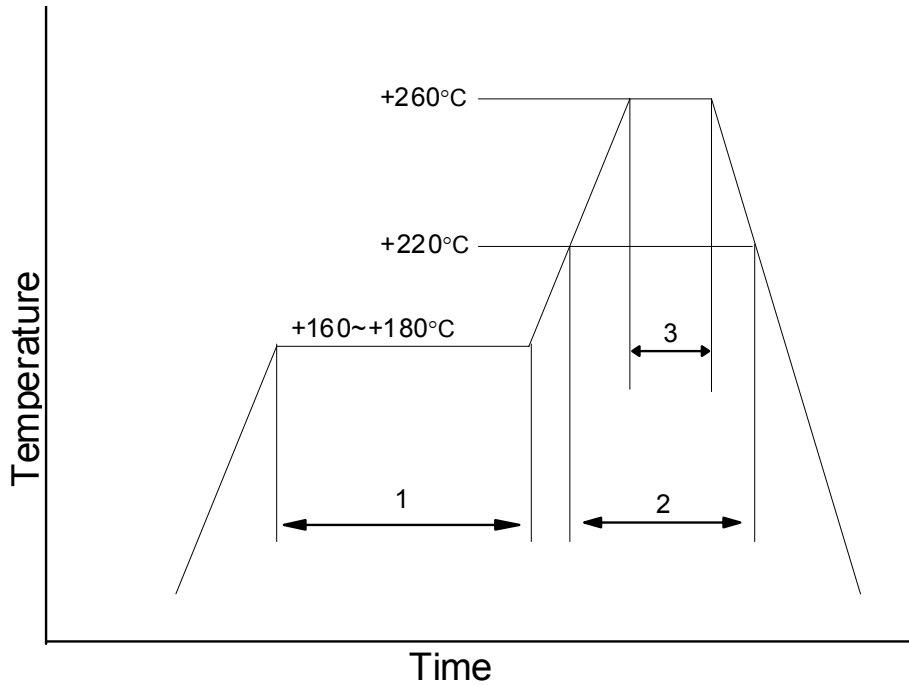


1	Preheat	+160~+180°C	120s
2	Primary Heat	+220°C	60s
3	Peak	+260°C	10s max.

TITLE DSA321SCA TYPE SPECIFICATION		Remark	
Date 2010/09/06	Spec. No. 1XTV19200ACW	Rev. -	Page 5/13

14. Bottom View / Land Pattern Layout / Metal Mask Hole


(1) Bottom View

A through hole is not located on the bottom (mounting side).

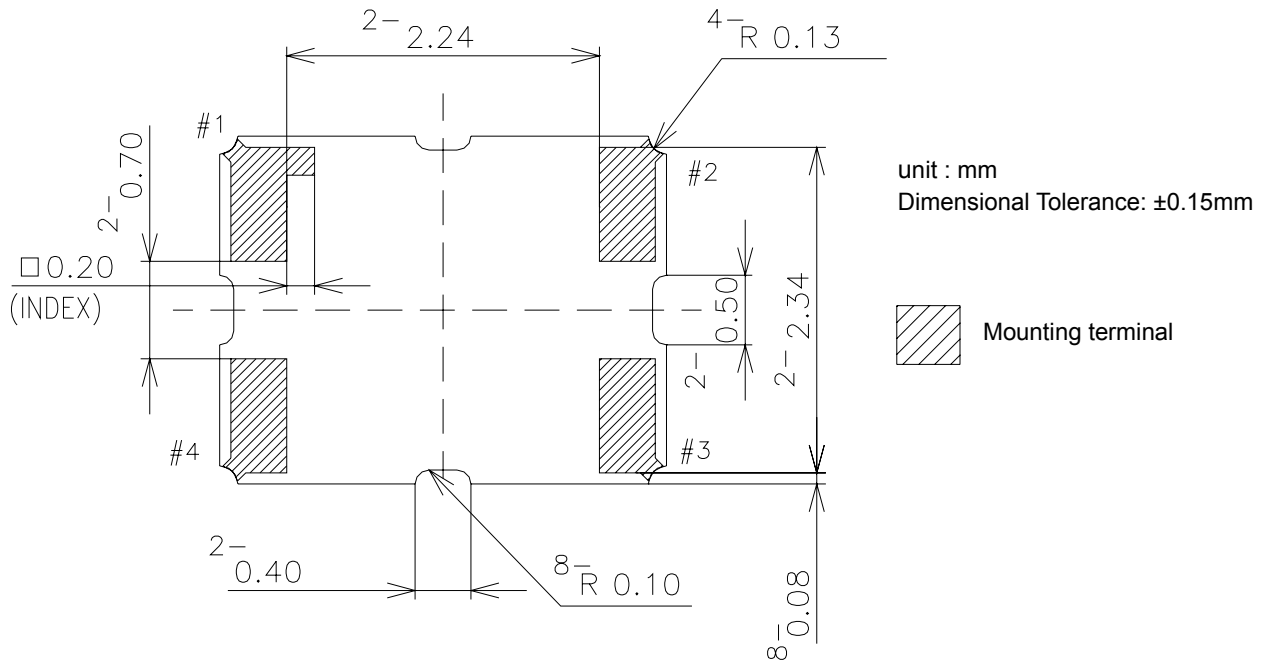

(2) Land Pattern Layout / Metal Mask Hole


The following land pattern is reference design. The electrical characteristic clause 7 shall be satisfied with mounting to this land. The land pattern can be changed in the limits to which a test land and a mounting land are not connected. And it does not any effect to the electrical characteristics. Mask thickness recommends 0.12mm.

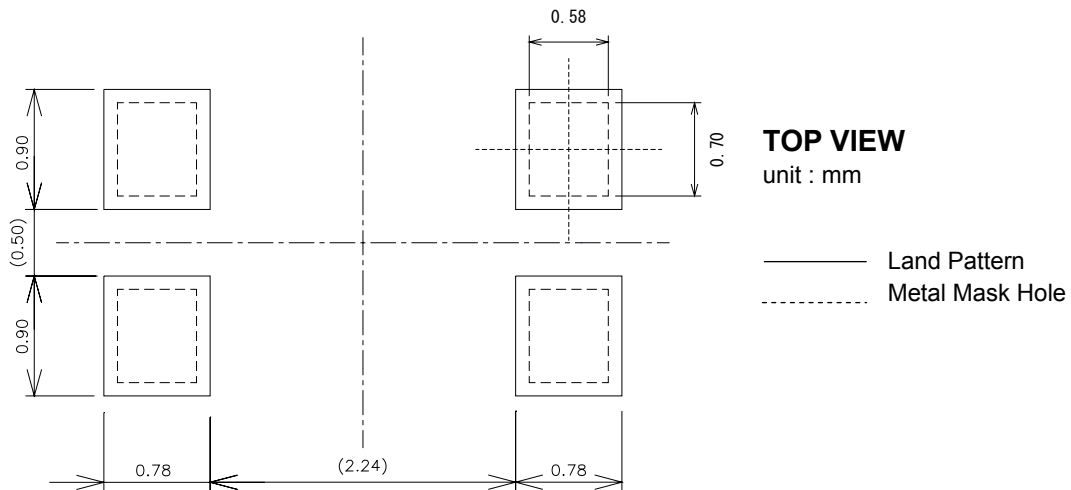


TITLE DSA321SCA TYPE SPECIFICATION		Remark		
Date 2010/09/06	Spec. No. 1XTV19200ACW	Rev. -	Page 6/13	





Pb-free Label




Lot Label



Antistatic Bag

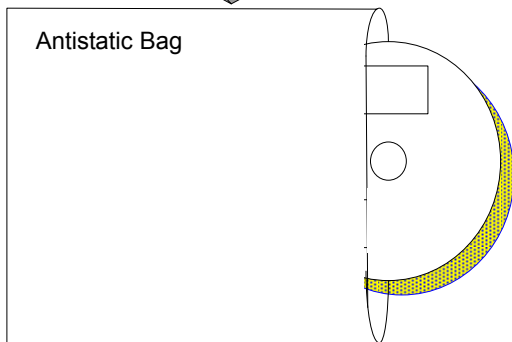


Air Cushion




Pb-free Label

Shipping Label

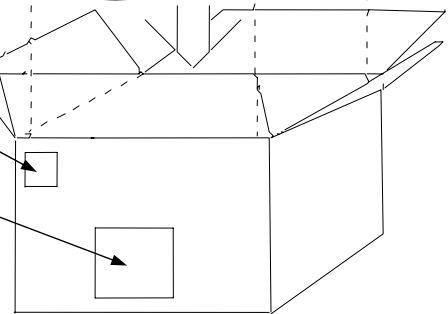

The product is packed up with the method which does not break in the handling by a shipping agent.

TITLE DSA321SCA TYPE SPECIFICATION		Remark	
Date 2010/09/06	Spec. No. 1XTV19200ACW	Rev. -	Page 8/13

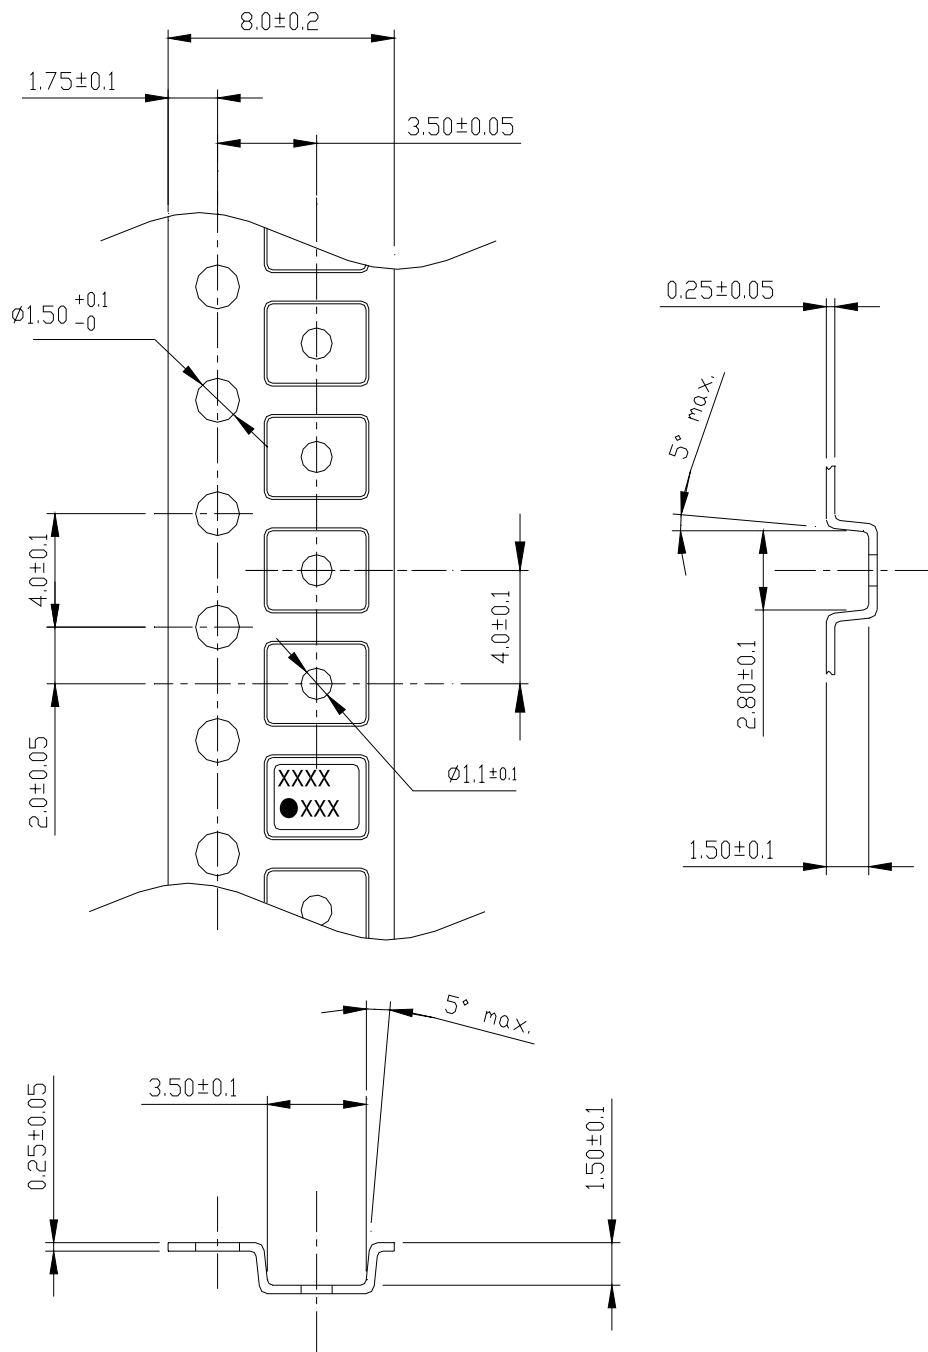

1) Clearance of an embossing tape, and a product unit : mm

Direction	Pocket size	TCXO size	Clearance
L	3.5±0.1	3.2±0.15	0.3±0.25
W	2.8±0.1	2.5±0.15	0.3±0.25
H	1.5±0.1	1.0 max.	0.5 min.


2) Quality : Polystyrene(Conductivity)

3) Tensile strength of an embossing tape : more than 14N

unit: mm

Fig.1. Emboss tape format and dimensions

TITLE DSA321SCA TYPE SPECIFICATION		Remark	
Date 2010/09/06	Spec. No. 1XTV19200ACW	Rev. -	Page 9/13

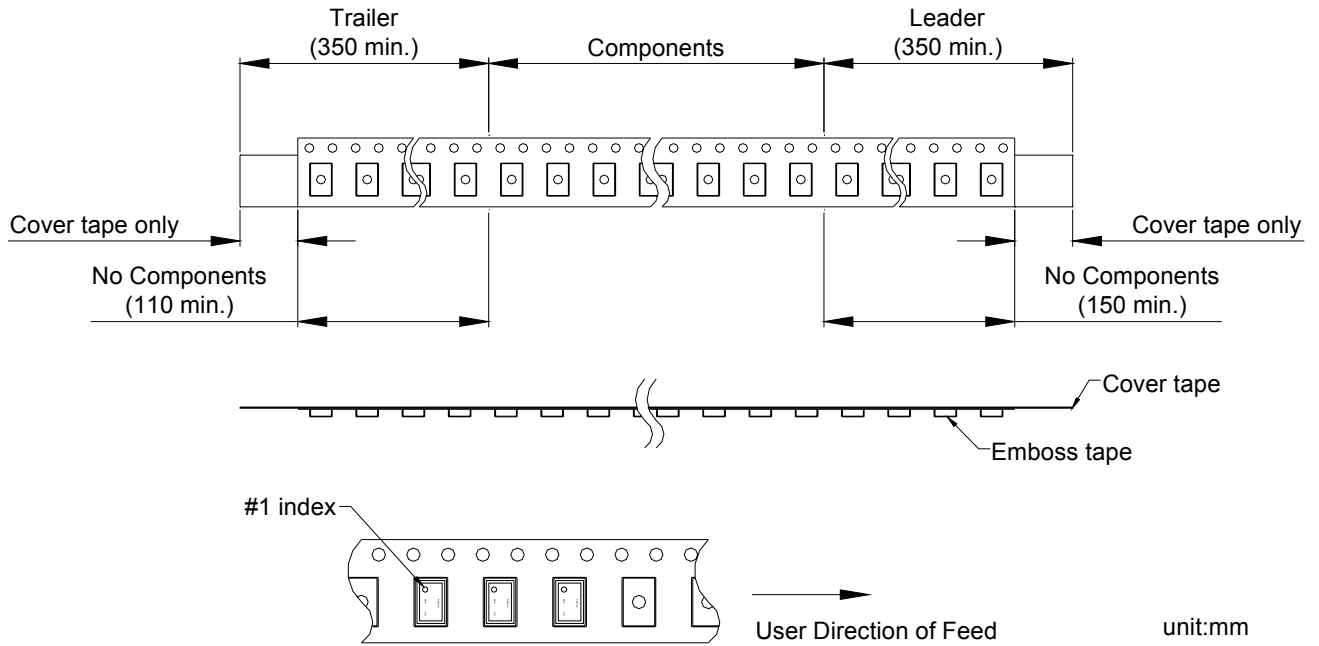

Direction of taking up reel is clock-wise as above.

There are sprocket holes on the right hand side of the tape when it is pulled out as shown above.

Peel strength

Pulling angle 165~180°, pulling speed at 300mm/min, strength should be 0.2~0.7N.


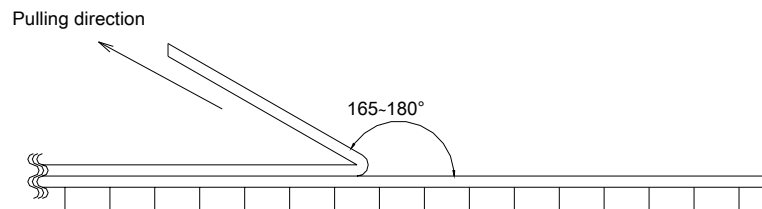


Fig.2. Taping specification

TITLE DSA321SCA TYPE SPECIFICATION		Remark	
Date 2010/09/06	Spec. No. 1XTV19200ACW	Rev. -	Page 10/13

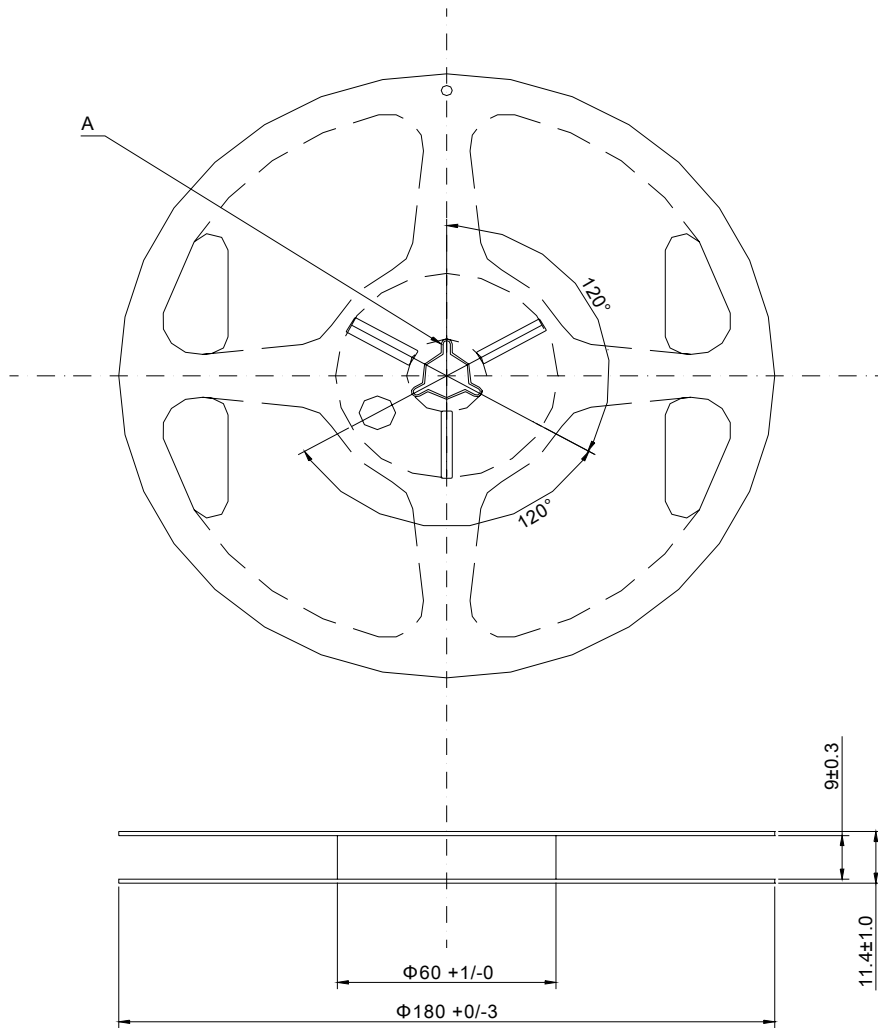

Material:Polystyrene (Conductivity)  
unit:mm

Section A




Fig.3. Reel specification

TITLE DSA321SCA TYPE SPECIFICATION		Remark	
Date 2010/09/06	Spec. No. 1XTV19200ACW	Rev. -	Page 11/13

**16. Notes on mounting and handling****16.1 Storage environment**

- (1) The temperature and humidity of a storage place, Please give +5~+40°C and 40~85% as a standard.
- (2) Please use this product within one year from the packing label date of issue.
- (3) Please avoid the place which generates corrosive gas, and the place with much dirt.
- (4) Please keep it in a place with little temperature change.

Dew condensation arises owing to a rapid temperature change and solderability becomes bad.

**16.2 Be cautions to static electricity and high voltage.**

**16.3** This product has sufficient durability to fall and vibration. However, conditions may change to the fall after mounting to a PWB, and vibration. When you should drop on a floor the PWB which mounted the product or too much shock is added. Please use after a performance check.

**16.4** Please check that the curvature of the substrate at the time of substrate cutting does not affect a product. Moreover, especially when a product is near the position of a PWB guide pin, and the position of a PWB break, be careful.

**16.5** The part concerned does not correspond to washing.

**16.6** Please repair at +260°C in 10s with hot air or +350°C in 5s with solder Iron.

**17. Mandatory control****17.1 Ozone-depleting substance**

It regulates by the U.S. air purifying method (November, 1990 establishment). ODS of CLASS1 and CLASS2 is not contained or used.

**17.2 PBDE, PBBs**

PBDE, PBBs are not contained into all the material currently used for this product.

**17.3 RoHS**

Following material restricted by RoHS is not included or used. Lead, mercury, cadmium, hexavalent , chromium ,PBB and PBDE.

**17.4 Law Concerning Examination and Regulation of Manufacture, etc. of Chemical Substances**

All the material currently used for this product is based on "Law Concerning Examination and Regulation of Manufacture, etc. of Chemical Substances". It is a registered material.

**17.5 Lead**

Leads, such as solder, are not used for this product.(Lead Free)

**17.6 About the existence of silver and mercury use**

The silver of very small quantity is contained in the conductive adhesives used for adhesion of Blank. Moreover, mercury is used. It does not get down.

**18. The country of origin / factory name / address**

Country of origin: Japan

Factory name: DAISHINKU Corp. Tottori Production Div.

Address : 7-3-21 Wakabadai minami, Tottori 689-1112

TITLE DSA321SCA TYPE SPECIFICATION		Remark		
Date 2010/09/06	Spec. No. 1XTV19200ACW	Rev. -	Page 12/13	

